



MATERIAL DATASHEET

Composites

Plastic Matrix	Test (ASTM)	Onyx	Nylon	
Tensile Modulus (GPa)	D638	1.4	0.94	<p>Dimensions and Construction of Plastic Test Specimens:</p> <ul style="list-style-type: none"> Tensile test specimens: ASTM D638 type IV beams Flexural test specimens: 3-pt. Bending, 4.5 in (L) x 0.4 in (W) x 0.12 in (H) Heat-deflection temperature at 0.45 MPa, 66 psi (ASTM D648-07 Method B) <p>All Markforged machines are equipped to print Onyx. Nylon is a specialized material that can only be printed on the Mark Two and X7. Machines that print Onyx cannot also print Nylon due to machine conditioning.</p> <p>Markforged parts are primarily composed of plastic matrix. Users may add one type of fiber reinforcement in each part, enhancing its material properties.</p> <p>1. Measured by a method similar to ASTM D790. Thermoplastic-only parts do not break before end of Flexural Test.</p>
Tensile Stress at Yield (MPa)	D638	36	31	
Tensile Strain at Yield (%)	D638	25	27	
Tensile Stress at Break (MPa)	D638	30	54	
Tensile Strain at Break (%)	D638	58	260	
Flexural Strength (MPa)	D790 ¹	81	32	
Flexural Modulus (GPa)	D790 ¹	2.9	0.84	
Heat Deflection Temp (°C)	D648 B	145	49	
Izod Impact - notched (J/m)	D256-10 A	330	1000	
Density (g/cm ³)	—	1.2	1.1	

Fiber Reinforcement	Test (ASTM)	Carbon	Kevlar®	Fiberglass	HSHT FG
Tensile Strength (MPa)	D3039	800	610	590	600
Tensile Modulus (GPa)	D3039	60	27	21	21
Tensile Strain at Break (%)	D3039	1.5	2.7	3.8	3.9
Flexural Strength (MPa)	D790 ¹	470	190	210	420
Flexural Modulus (GPa)	D790 ¹	51	26	22	21
Flexural Strain at Break (%)	D790 ¹	1.2	2.1	1.1	2.2
Compressive Strength (MPa)	D6641	320	97	140	192
Compressive Modulus (MPa)	D6641	54	28	21	21
Compressive Strain at Break (%)	D6641	0.7	1.5	—	—
Heat Deflection Temp (°C)	D648 B	105	105	105	150
Izod Impact - notched (J/m)	D256-10 A	960	2000	2600	3100
Density (g/cm ³)	—	1.4	1.2	1.5	1.5

Dimensions and Construction of Fiber Composite Test Specimens:

- Test plaques used in these data are fiber reinforced unidirectionally (0° Plies)
- Tensile test specimens: 9.8 in (L) x 0.5 in (H) x 0.048 in (W) (CF composites), 9.8 in (L) x 0.5 in (H) x 0.08 in (W) (GF and Kevlar® composites)
- Compressive test specimens: 5.5 in (L) x 0.5 in (H) x 0.085 in (W) (CF composites), 5.5 in (L) x 0.5 in (H) x 0.12 in (W) (Kevlar® and GF composites)
- Flexural test specimens: 3-pt. Bending, 4.5 in (L) x 0.4 in (W) x 0.12 in (H)
- Heat-deflection temperature at 0.45 MPa, 66 psi (ASTM D648-07 Method B)

Tensile, Compressive, Strain at Break, and Heat

Deflection Temperature data were provided by an accredited 3rd party test facility. Flexural data were prepared by Markforged, Inc. These represent typical values.

Markforged tests plaques are uniquely designed to maximize test performance. Fiber test plaques are fully filled with unidirectional fiber and printed without walls. Plastic test plaques are printed with full infill. To learn more about specific testing conditions or to request test parts for internal testing, contact a Markforged representative.

Part and material performance will vary by fiber layout design, part design, specific load conditions, test conditions, build conditions, and the like.

This representative data were tested, measured, or calculated using standard methods and are subject to change without notice. Markforged makes no warranties of any kind, express or implied, including, but not limited to, the warranties of merchantability, fitness for a particular use, or warranty against patent infringement; and assumes no liability in connection with the use of this information. The data listed here should not be used to establish design, quality control, or specification limits, and are not intended to substitute for your own testing to determine suitability for your particular application. Nothing in this sheet is to be construed as a license to operate under or a recommendation to infringe upon any intellectual property right.



MATERIAL DESCRIPTIONS

Composites

Printing Methods

Plastic Matrix


In Fused Filament Fabrication (FFF), the printer heats thermoplastic filament to near melting point and extrudes it through its nozzle, building a plastic matrix layer by layer. Markforged prints all thermoplastics by this method.

Onyx Nylon

Fiber Reinforcement

Continuous Filament Fabrication (CFF) is our unique technology that adds fiber reinforcement to printed parts. Within our thermoplastic matrix, Markforged uses proprietary technology to lay down continuous long-strand fiber. Users can control the layers reinforced, amount, orientation, and type of reinforcing fiber.

Fiberglass Carbon Fiber
Kevlar® HSH T Fiberglass

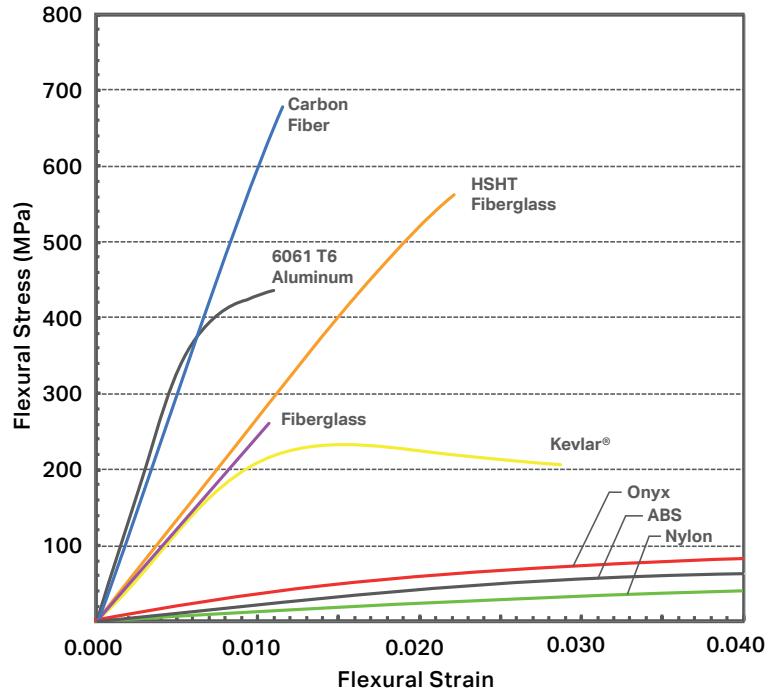

Materials

Onyx Plastic

Engineering Grade Thermoplastic
Onyx yields stiff, strong, and accurate parts. Already 1.4 times stronger and stiffer than ABS, Onyx can be reinforced with any continuous fiber. Onyx sets the bar for surface finish, chemical resistivity, and heat tolerance.

Flexural Strength 81 MPa
Flexural Stiffness 2.9 GPa

Nylon Plastic

Tough Flexible Thermoplastic
Nylon parts are flexible, impact-resistant and can be reinforced with any Markforged continuous fiber. The material works best in applications that require increased flexibility or low working friction.

Flexural Strength 32 MPa
Flexural Stiffness 0.84 GPa

Fiberglass Fiber

Reinforced Fiber Strength
Fiberglass is our entry level continuous fiber, providing high strength at an accessible price. 2.5 times stronger and eight times stiffer than Onyx, Fiberglass reinforcement results in strong, robust tools.

Flexural Strength 210 MPa
Flexural Stiffness 22 GPa

Kevlar® Fiber

Lightweight, Durable, and Strong
Kevlar® possesses excellent durability, making it optimal for parts that experience repeated and sudden loading. As stiff as fiberglass and much more ductile, it's best used for end of arm tooling.

Flexural Strength 190 MPa
Flexural Stiffness 26 GPa

Carbon Fiber Fiber

Aluminum Strength. Half the Weight.
Carbon Fiber has the highest strength to weight ratio of our reinforcing fibers. Six times stronger and eighteen times stiffer than Onyx, Carbon Fiber reinforcement is commonly used for parts that replace machined aluminum.

Flexural Strength 470 MPa
Flexural Stiffness 51 GPa

HSH T Fiberglass Fiber

Strength at High Temperatures
High Strength High Temperature (HSH T) Fiberglass exhibits Aluminum strength and high heat tolerance. Five times as strong and seven times as stiff as Onyx, it's best used for parts loaded in high operating temperatures.

Flexural Strength 420 MPa
Flexural Stiffness 21 GPa