

## ULTEM™ Resin 1010

### Europe-Africa-Middle East: COMMERCIAL

ULTEM™ 1010 resin is an amorphous, transparent polyetherimide (PEI) plastic offering enhanced flow and a glass transition temperature (T<sub>g</sub>) of 217°C. This inherently flame retardant resin has UL94 V0 and 5VA ratings. For Healthcare applications which require biocompatibility we recommend ULTEM™ HU1010 resin as an alternative. For US FDA and EU Food Contact compliance, please select 1010F resin. ULTEM™ 1010 resin is an unreinforced general purpose grade offering high heat resistance, high strength and modulus and broad chemical resistance up to high temperatures.

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	Unit	Standard
<b>MECHANICAL</b>			
Taber Abrasion, CS-17, 1 kg	10	mg/1000cy	SABIC Method
Tensile Stress, yield, 50 mm/min	105	MPa	ISO 527
Tensile Stress, break, 50 mm/min	85	MPa	ISO 527
Tensile Strain, yield, 50 mm/min	6	%	ISO 527
Tensile Strain, break, 50 mm/min	60	%	ISO 527
Tensile Modulus, 1 mm/min	3200	MPa	ISO 527
Flexural Stress, yield, 2 mm/min	160	MPa	ISO 178
Flexural Modulus, 2 mm/min	3300	MPa	ISO 178
Hardness, H358/30	140	MPa	ISO 2039-1
<b>IMPACT</b>			
Izod Impact, unnotched 80*10*4 +23°C	NB	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, unnotched 80*10*4 -30°C	NB	kJ/m <sup>2</sup>	ISO 180/1U
Izod Impact, notched 80*10*4 +23°C	5	kJ/m <sup>2</sup>	ISO 180/1A
Izod Impact, notched 80*10*4 -30°C	5	kJ/m <sup>2</sup>	ISO 180/1A
<b>THERMAL</b>			
Thermal Conductivity	0.21	W/m-°C	ISO 8302
CTE, 23°C to 150°C, flow	5.E-05	1/°C	ISO 11359-2
CTE, 23°C to 150°C, xflow	5.E-05	1/°C	ISO 11359-2
Ball Pressure Test, 125°C +/- 2°C	PASSES	-	IEC 60695-10-2
Vicat Softening Temp, Rate A/50	215	°C	ISO 306
Vicat Softening Temp, Rate B/50	211	°C	ISO 306
Vicat Softening Temp, Rate B/120	212	°C	ISO 306
HDT/Be, 0.45MPa Edgew 120*10*4 sp=100mm	200	°C	ISO 75/Be

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

**ULTEM™ Resin 1010**

**Europe-Africa-Middle East: COMMERCIAL**

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	Unit	Standard
<b>THERMAL</b>			
HDT/Ae, 1.8 MPa Edgew 120*10*4 sp=100mm	190	°C	ISO 75/Ae
Relative Temp Index, Elec	170	°C	UL 746B
Relative Temp Index, Mech w/impact	170	°C	UL 746B
Relative Temp Index, Mech w/o impact	170	°C	UL 746B
<b>PHYSICAL</b>			
Mold Shrinkage on Tensile Bar, flow (2) (5)	0.5 - 0.7	%	SABIC Method
Density	1.27	g/cm <sup>3</sup>	ISO 1183
Water Absorption, (23°C/sat)	1.25	%	ISO 62
Moisture Absorption (23°C / 50% RH)	0.7	%	ISO 62
Melt Volume Rate, MVR at 340°C/5.0 kg	13	cm <sup>3</sup> /10 min	ISO 1133
Melt Volume Rate, MVR at 360°C/5.0 kg	25	cm <sup>3</sup> /10 min	ISO 1133
<b>ELECTRICAL</b>			
Volume Resistivity	1.E+15	Ohm-cm	IEC 60093
Surface Resistivity, ROA	>1.E+15	Ohm	IEC 60093
Dielectric Strength, in oil, 0.8 mm	33	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 1.6 mm	25	kV/mm	IEC 60243-1
Dielectric Strength, in oil, 3.2 mm	16	kV/mm	IEC 60243-1
Relative Permittivity, 1 MHz	2.9	-	IEC 60250
Dissipation Factor, 50/60 Hz	0.0005	-	IEC 60250
Dissipation Factor, 1 MHz	0.006	-	IEC 60250
Dissipation Factor, 2450 MHz	0.0025	-	IEC 60250
Comparative Tracking Index	150	V	IEC 60112
Comparative Tracking Index, M	100	V	IEC 60112
Relative Permittivity, 50/60 Hz	2.9	-	IEC 60250
<b>FLAME CHARACTERISTICS</b>			
UL Recognized, 94V-0 Flame Class Rating (3)	1.5	mm	UL 94

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.  
 (3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.  
 (4) Internal measurements according to UL standards.  
 (5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.  
 (6) Needs hard coat to consistently pass 60 sec Vertical Burn.



## ULTEM™ Resin 1010

### Europe-Africa-Middle East: COMMERCIAL

TYPICAL PROPERTIES <sup>1</sup>	TYPICAL VALUE	Unit	Standard
<b>FLAME CHARACTERISTICS</b>			
UL Recognized, 94-5VA Rating (3)	3	mm	UL 94
Glow Wire Flammability Index 960°C, passes at	3.2	mm	IEC 60695-2-12
Oxygen Index (LOI)	47	%	ISO 4589

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.

**ULTEM™ Resin 1010**

**Europe-Africa-Middle East: COMMERCIAL**

<b>PROCESSING PARAMETERS</b>	<b>TYPICAL VALUE</b>	<b>Unit</b>
<b>Injection Molding</b>		
Drying Temperature	150	°C
Drying Time	4 - 6	hrs
Maximum Moisture Content	0.02	%
Melt Temperature	370 - 410	°C
Nozzle Temperature	350 - 405	°C
Front - Zone 3 Temperature	360 - 415	°C
Middle - Zone 2 Temperature	350 - 405	°C
Rear - Zone 1 Temperature	340 - 395	°C
Hopper Temperature	80 - 120	°C
Mold Temperature	140 - 180	°C


(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.  
 (3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.  
 (4) Internal measurements according to UL standards.  
 (5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.  
 (6) Needs hard coat to consistently pass 60 sec Vertical Burn.



**ULTEM™ Resin 1010**  
**Europe-Africa-Middle East: COMMERCIAL**

**CALCULATED FLOW LENGTH INDICATION**  
**Moldflow® Radial Flow Analysis**  
**ULTEM® 1010**  
**Melt Temperature : 380°C**  
**Mold Temperature : 160°C**

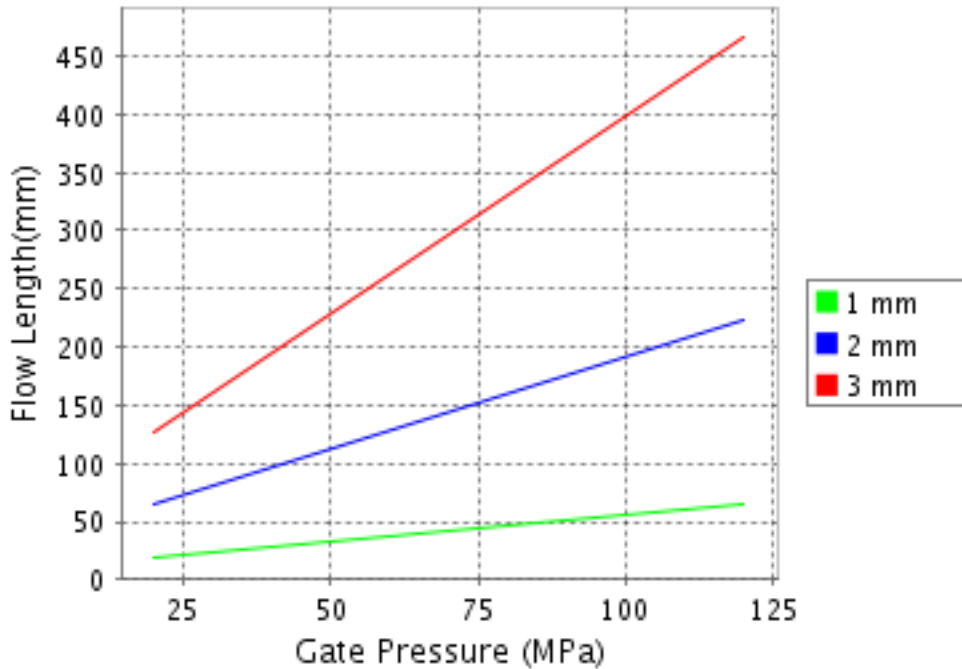

**Note: Technical support is recommended if Gate Pressure is greater than 80 MPa. Contact your local representative.**  
© Moldflow is a registered trademark of the Moldflow Corporation.

(1) Typical values only. Variations within normal tolerances are possible for various colors. All values are measured after at least 48 hours storage at 23°C/50% relative humidity. All properties, except the melt volume and melt flow rates, are measured on injection molded samples. All samples tested under ISO test standards are prepared according to ISO 294.

(2) Only typical data for selection purposes. Not to be used for part or tool design.

(3) This rating is not intended to reflect hazards presented by this or any other material under actual fire conditions.

(4) Internal measurements according to UL standards.

(5) Measurements made from laboratory test coupon. Actual shrinkage may vary outside of range due to differences in processing conditions, equipment, part geometry and tool design. It is recommended that mold shrinkage studies be performed with surrogate or legacy tooling prior to cutting tools for new molded article.

(6) Needs hard coat to consistently pass 60 sec Vertical Burn.